

USER'S GUIDE TO PLASTIC

Materials – Processing methods – Tool design
Cost calculation – Post-moulding processes
Assembly methods – Material selection
Design rules – Process optimisation
Trouble shooting

A handbook by Ulf Bruder

User's guide to plastic

A handbook for everyone

Ulf Bruder

www.brucon.se

This book is produced in own publishing by Bruder Consulting AB.

Bruder Consulting AB
Barkassgatan 9
SE-371 32 Karlskrona
Sweden

Phone: +46 733 720450
Email: info@brucon.se
Webb: www.brucon.se

© 2014 by Ulf Bruder och Bruder Consulting AB.

All rights reserved. No portion of the content of this publication may be reproduced or transmitted in any form or by any means without the express written permission of Bruder Consulting AB.

We have done our best to ensure that the material found in this publication is both useful and accurate. However, please, be aware that errors may exist in this publication, and that neither the author nor Bruder Consulting AB make any guarantees concerning the accuracy of the information found here in the use to which it may be put.

Printed in Estonia

First printing
ISBN 978-91-633-8058-7

Table of contents

Foreword	4
1. Polymers and plastics	5
2. Commodities	9
3. Engineering polymers	19
4. Thermoplastic elastomers	27
5. Advanced thermoplastics	33
6. Bioplastics	41
7. Plastics and the environment	47
8. Modification of plastics	51
9. Material data and measurements	59
10. Material databases on the Internet	65
11. Test methods for plastic materials and mouldings	67
12. Injection moulding methods	73
13. Post-moulding operations	77
14. Different types of moulds	81
15. Structure of moulds	87
16. Mould design and product quality	93
17. Prototype moulds and Moldflow simulation software	97
18. Rapid prototyping and 3D printing	103
19. Cost calculation for thermoplastic mouldings	111
20. Non-injection moulding processing methods	117
21. Material selection process	127
22. Requirements and specification for plastic products	131
23. Design rules for thermoplastic mouldings	145
24. Assembly methods for thermoplastic mouldings	159
25. The injection moulding process	165
26. Injection moulding process parameters	183
27. Problem solving and quality management	185
28. Trouble shooting – causes and effects	195
29. Statistical Process Control SPC	215
30. Internet links and indexes	223

Link to working files: www.brucon.se User name: Password:

Chapter 1 – Polymers and Plastics

Sometimes you get the question: What is the difference between polymer and plastic? The answer is simple: there is no difference, it's the same thing. The word "polymer" comes from the Greek "poly", which means many, and "meros", which means unity.

The online encyclopedia Wikipedia (www.wikipedia.org) states the following: "Polymers are chemical compounds that consist of very long chains composed of small repeating units, monomers. Polymer chains are different from other chain molecules in organic chemistry because they are much longer than, for example, chains of alcohols or organic acids. The reaction that occurs when the monomers become a polymer is called polymerization. Polymers in the form of engineering materials are known in daily speech as plastics."

By plastic, we mean that the engineering material is based on polymers, generally with various additives to give the material the desired properties, such as colours or softeners. Polymeric materials are usually divided into rubber materials (elastomers), thermosets and thermoplastics."

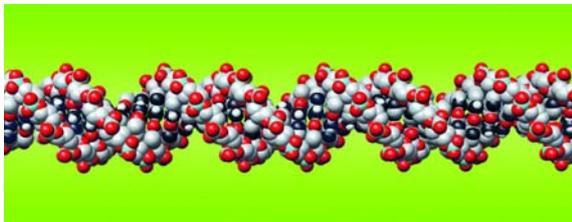


Fig 1. Polymers are large macromolecules where monomer molecules bind to each other in long chains. There may be several thousand monomer molecules in a single polymer chain.

Most polymers are synthetically produced, but there are also natural polymers such as natural rubber and amber that have been used by mankind for thousands of years.

Other natural polymers include proteins, nucleic acids and DNA. Cellulose, which is the major component in wood and paper, is also a natural polymer.

In other words, plastic is a synthetically manufactured material composed of monomer molecules that bind to each other in long chains. If the polymer chain is made up solely of one monomer it is called polymer homopolymer.

If there are several kinds of monomers in the chain, the polymer is called co-polymer. An example of a plastic that can occur both as homopolymer and copolymer is acetal. Acetal is labeled POM (polyoxymethylene) and is mostly up-built of a monomer known as formaldehyde. The building blocks (atoms) in formaldehyde are composed of carbon, hydrogen and oxygen.

Most plastic materials are composed of organic monomers but may in some cases also be composed of inorganic acids. One example of an inorganic polymer is a silicone resin consisting of polysiloxanes, where the chain is built up of silicon and oxygen atoms.

Carbon and hydrogen are the other dominant elements in plastics. In addition to the aforementioned elements carbon (C), hydrogen (H), oxygen (O) and silicon (Si), plastics typically consist of another five elements: Nitrogen (N), fluorine (F), phosphorus (P), sulfur (S) and chlorine (Cl).



Fig. 2 Amber is a natural polymer. The mosquito in this stone got stuck in the resin of a conifer more than 50 million years ago - something to think about when considering the decomposition of certain polymers in nature.

Chapter 2 – Commodities

Polyethylene (PE)

Polyethylene or polyethene is a semi-crystalline commodity, denoted as PE, and also known as polyethylene. It is the most common plastic and more than 60 million tons are manufactured each year worldwide. "Low density" polyethylene (LDPE) was launched on the market by the British chemicals group ICI in 1939.

Chemical facts:

Polyethylene has a very simple structure and consists only of carbon and hydrogen. It belongs to a class of plastics called olefins. These are characterized by their monomers having a double bond and they are very reactive. The chemical symbol for ethylene, the monomer in PE, is C_2H_4 or $CH_2 = CH_2$, where the "=" sign symbolizes the double bond. Polyethylene can be graphically described as:

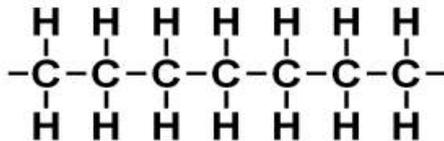


Fig 13. One reason that PE has become the main commodity is its extensive usage as a packaging material. Plastic bags are made of LDPE.

Classification

Polyethylene can be classified into different groups depending on its density and the lateral branches on the polymer chains:

- UHMWPE – Ultra high molecular weight
- HDPE – High density
- MDPE – Medium density
- LLDPE – Linear low density
- LDPE – Low density
- PEX – Cross-linked

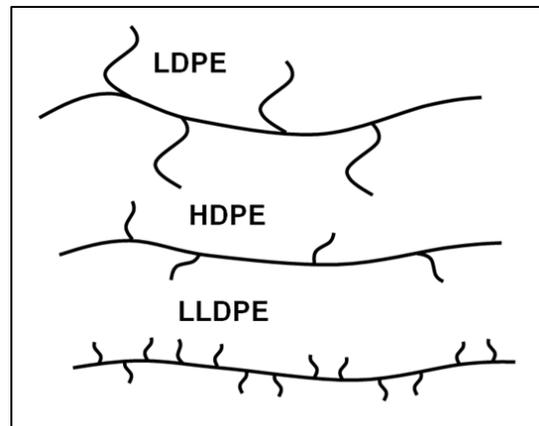


Fig 14. When polymerizing ethylene to polyethylene, there are various processes resulting in more or less lateral branches on the molecular chains. A smaller number of lateral branches give a higher crystallinity, molecular weight and density, since the chains can thus be packed more densely. HDPE has few or no lateral branches, and is also called linear polyethylene.

Properties of Polyethylene:

- | | |
|--|---|
| + Low material price and density | + Excellent wear resistance (UHMWPE) |
| + Excellent chemical resistance | + Easy to colour |
| + Negligible moisture absorption | - Stiffness and tensile strength |
| + Food approved grades are available | - Cannot handle temperatures above 80°C |
| + High elasticity down to $< -50^{\circ}C$ | - Difficult to paint |

The mechanical properties depend largely on the presence of lateral branches, crystallinity and density i.e. the type of polyethylene.

Chapter 3 – Engineering Polymers

Polyamide or Nylon

Polyamide is a semi-crystalline engineering plastic, denoted by PA. There are several different types of polyamide of which PA6 and PA66 are the most common. Polyamide was the first engineering polymer launched on the market. It is also the largest in volume since it is widely used in the automotive industry.

Polyamide was invented by DuPont in the United States in 1934 and was first launched as a fibre in parachutes and women's stockings under the trade name Nylon.

A few years later, the injection moulding grades were launched. Nylon became a general term, DuPont lost the trademark and currently markets its polyamides under the trade name Zytel. Ultramid from BASF, Durethan from Lanxess and Akulon from DSM are some of the other famous trade names on the market.

Classification


The development of polyamide has focused on improving the high temperature properties and reducing water absorption. This has led to a number of variants where in addition to PA6 and PA66 following types should be mentioned: PA666, PA46, PA11, PA12 and PA612.

About a decade ago, aromatic "high performance" polyamides were introduced, usually known as PPA, which stands for polyphthalamide. The latest trend is "bio-polyamides" made from long chain monomers e.g. PA410, PA610, PA1010, PA10, PA11 and PA612.



Chemical facts:

Polyamide is available in a number of variations, labeled alphanumerically, e.g. PA66, indicating the number of carbon atoms in the molecules that make up the monomer. PA6 is the most common type of polyamide and has the simplest structure:

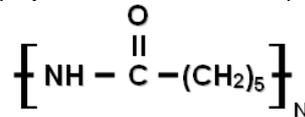

PA66 has a monomer that consists of two different molecules wherein each molecule has six carbon atoms, as illustrated below:

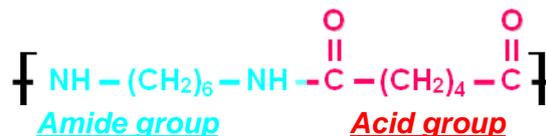


Fig 43. Polyamide has an excellent combination of good electrical properties, high operating temperatures and flame retardant capability (up to UL V-0 classification). The material is therefore used for electrical components such as fuses, circuit breakers, transformer housing, etc. Photo: DuPont

Properties of Polyamide:

- + Stiffness at high temperatures (glass fibre reinforced PA)
- + High service temperatures: 120 °C constantly and a short term peak temperature of 180 °C
- + Good electrical properties
- + Food approved grades are available
- + Can be made flame-retardant
- Absorbs excess moisture from the air which alters the mechanical properties and dimensional stability
- Brittleness at low temperatures if not impact modified

Mechanical Properties	DAM	Cond.	Unit
Stiffness (tensile modulus)	3100	1400	MPa
Tensile stress (at yield)	82	53	MPa
Elongation at yield	4,5	25	%
Charpy notched impact strength + 23°C	5,5	15	kJ/m ²
Charpy notched impact strength - 30°	4,5	3	kJ/m ²

Fig 44. The table shows the mechanical properties of a standard quality of PA66 in a DAM, Dry As Moulded (unconditioned) state and after the material has absorbed 2.5% humidity at 23 ° C and 50% rel. humidity (conditioned state). The stiffness decreases by 65% and tensile strength by 35%, while toughness (elongation) increases 5 fold. The impact strength at room temperature increases 3 fold but drops by 33% at low temperature.

Source: DuPont

Chapter 4 – Thermoplastic Elastomers

Thermoplastic elastomers (TPE) are soft thermoplastics with a low E-modulus and high toughness. Also called thermoplastic rubbers, their toughness is sometimes indicated by Shore A or Shore D to characterize them, as with rubber. Their chemical structure consists of both thermoplastic hard segments and elastic soft segments. The crucial difference to traditional rubber is the lack of, or at least very slight, cross-linking between the molecular chains. Most of the various TPEs offer a cost-effective alternative to rubber in a variety of applications, thanks to its suitability for different processes such as injection moulding, extrusion, film and blow moulding. Feature wise, however, rubber has the advantage of higher elasticity and lower compression under constant load. All the thermoplastic elastomers are ideal for material recycling although incineration for energy extraction is also an option.

TPEs can generally be divided into the following groups:

- TPE-O, olefin based elastomers
- TPE-S, styrene based elastomers
- TPE-V, olefin based elastomers with vulcanised rubber particles
- TPE-U, polyurethane based elastomers
- TPE-E, polyester based elastomers
- TPE-A, polyamide based elastomers

TPE-O

TPE-O (or TPO) thermoplastic elastomers, where the "O" stands for "olefin", are a blend of polypropylene and EPDM uncured rubber particles. Because it has a PP matrix, TPO takes on a semi-crystalline structure. TPO-based elastomers are among the largest and most cost effective TPEs available. They have been on the market since 1970 and leading manufacturers are Elasto, Elastron, Exxon Mobile, So.F.teR and Teknor Apex.

By mixing the levels of EPDM in PP at concentrations from 10 to 65%, a great range of properties can be achieved. With mixture concentrations below 20% we usually call the materials impact modified PP, while levels above 60% give the more rubber-like properties.


The recycling code for TPE-O is: > PP + EPDM <.

Properties of TPE-O

- + Cost effective substitute for rubber
- + High stretch factor
- + Good tear resistance
- + Flexible at low temperatures
- + Good surface finish
- + Good chemical resistance
- + Can be UV stabilized
- + Easy to process
- + Can be coloured
- + Paintable (primer required)
- Deformation properties (i.e. setting characteristics) not as good as rubber

Chemical facts:

The predominant TPO types are made up of monomers of polypropylene and uncross-linked EPDM rubber (ethylene-propylene-diene-monomer (M-class)). The properties depend on the monomer units where "n" can be 90 – 35 % and "m" 10 – 65 %.

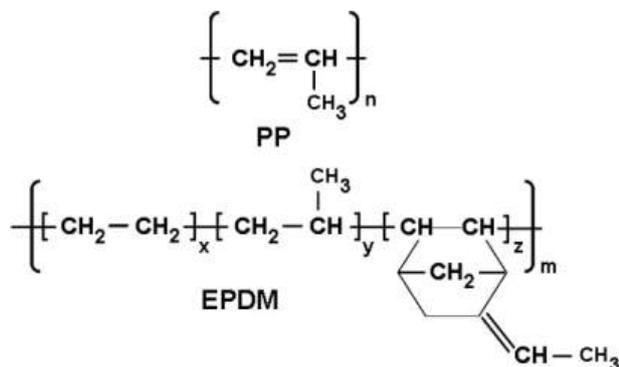

Chapter 5 – High performance polymers

Advanced thermoplastics

In everyday speech we describe this type of material "high performance" which means plastics with the best properties. What kind of qualities do we have in mind when developing materials to belong to this category?

Below we can see the wish list the researchers may have had when they set out to improve the properties of engineering plastics:

- Improved ability to replace metals
- Improved mechanical properties such as stiffness, tensile strength and impact strength
- Increased service temperature
- Reduced influence of ambient temperature and humidity on the mechanical properties
- Less tendency to creep under load
- Improved chemical resistance (especially considering the fluids used in cars i.e. fuel, oil, antifreeze, detergents, etc.)
- Improved flame retardant properties
- Improved electrical insulation properties
- Less friction and wear
- Improved barrier properties (primarily to fuel and oxygen)

In addition, any new material would be required to:

- Have a reasonable price in relation to the properties it offers
- Be easy to process using conventional machinery
- Be simple to recycle

Advanced reinforcement systems with carbon and aramid fibres or coating with so called nano-metals can also be used in combination with advanced polymers to achieve the above goals.

Plastics designed to replace metals are sometimes called "structural materials", and clearly have a great role to play in the future, especially since to date it is estimated that only 4% of the potential applications have been converted.

This section gives an overview of the following semi-crystalline advanced polymers:

1. Fluoropolymer (PTFE)
2. High performance aromatic polyamide (PPA)
3. "Liquid crystal polymer" (LCP)
4. Polyphenylene sulfide (PPS)
5. Polyether ether ketone (PEEK)

And the following amorphous polymers:

6. Polyetherimide (PEI)
7. Polysulphone (PSU)
8. Polyphenylsulphone (PPSU)

Recycling

All materials in this group can be recycled and they have the material abbreviation in square brackets (e.g. > PTFE <) as their recycling code.

Chapter 6 – Bioplastics and biocomposites

Definition

If you ask a professional "what is a bioplastic?", you would get one of three different answers:

- 1) It is a plastic manufactured from biological based raw materials.
- 2) It is a plastic that is biodegradable, i.e. can be degraded by microorganisms or enzymes.
- 3) It is a plastic that contains natural fibres.

Since biobased plastics are not necessarily biodegradable and biodegradable plastics do not have to be biobased, it is important to be clear about what you really mean. The percentage of renewable ingredients necessary for a plastic to be considered "bio" has not been established, although leading bioplastic suppliers deem that it should be at least 20%.

Plastics containing natural fibres are also called "biocomposites" and are mostly traditional plastics that have been reinforced or blended with natural fibres such as wood, flax, hemp or cellulose.

In addition to the commodities PE and PP, there are also biopolyesters, such as PLA.



Fig 95. Some of the first thermoplastics were manufactured from cellulose but they currently have little commercial significance, except for viscose fibre. Ping pong balls were originally made of celluloid and are still produced from cellulosic materials.

What do we mean by Bioplastic?

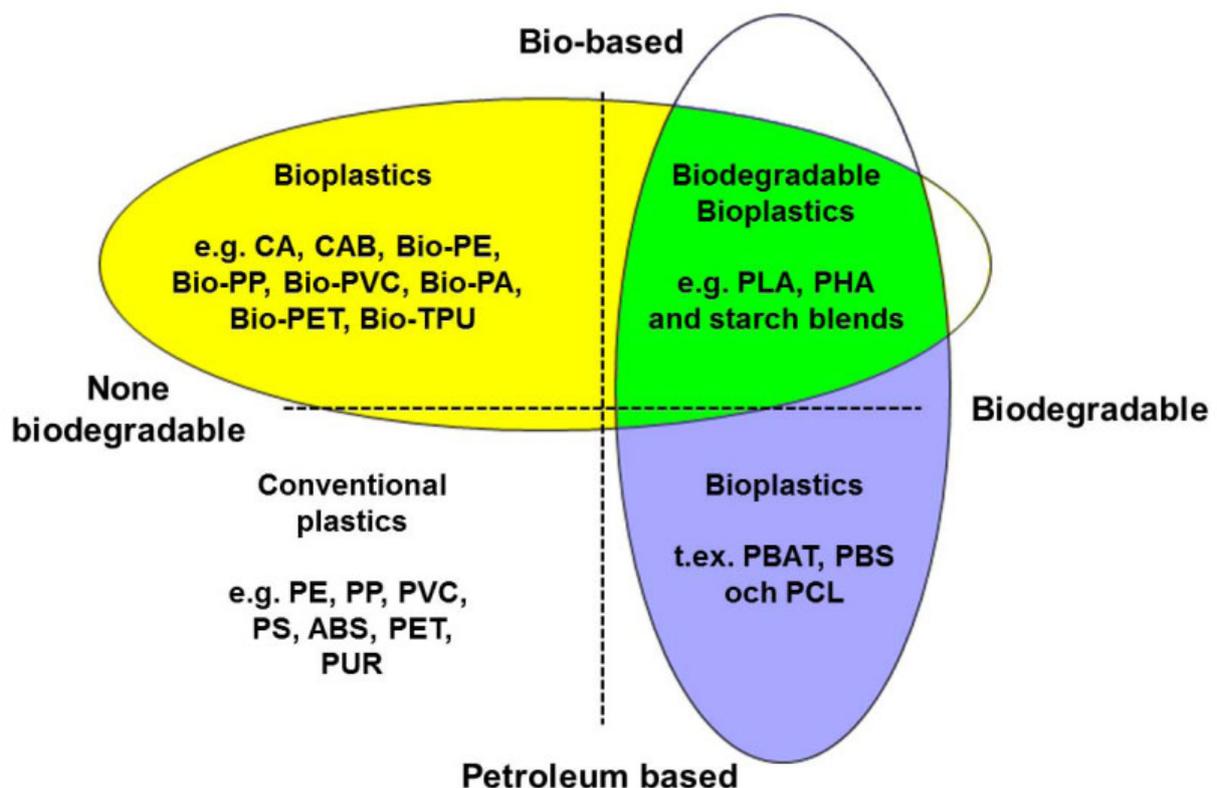


Fig 96 The illustration shows how to divide thermoplastics into conventional petroleum-based plastics and different types of bioplastics.

Chapter 7 – Plastic and the environment

At first glance, the title of this chapter may seem ambiguous. Do we mean how plastic affects our environment? Or how various environmental factors affect plastic? We will consider both aspects.

The use of plastics is constantly increasing. One important reason is the fact that plastics contribute to increased resource management - for example, saving energy and reducing emissions. Plastics also contribute to technological development.

The plastic industry wants to contribute to a sustainable society. That's why they invest considerable resources in the production of environmentally friendly materials and resource-efficient processes.



Fig 111. The use of plastics reduces our climate impact by saving energy and reducing CO2 emissions.

Plastic is climate-friendly and saves energy

That plastic can slow climate change by saving energy and reducing our emission of greenhouse gases is not something we may instantly think of. The recent study "Plastics' Contribution to Climate Protection" concluded that the use of plastic in the 27 EU member states plus Norway and Switzerland contributes to the following environmental benefits:

- Plastic products enable energy savings equivalent to 50 million tons of crude oil – that's 194 very large oil tankers.
- Plastic prevents the emission of 120 million tons of greenhouse gas emissions per year, which is equivalent to 38% of the EU's Kyoto target.
- The average consumer causes around 14 tons of carbon dioxide emission. Only 1.3 percent of that – about 170 kg – is derived from plastic.

In the automotive and aerospace industries, the use of plastic saves weight and thus reduces fuel costs. In the construction industry, plastic is increasingly used as a superior insulation material that provides a good indoor environment and reduces energy consumption.



Fig 112. Plastic accounts for approx. 12 -15% of a modern car's weight, which in Europe alone results in annual savings of 12 million tons of oil and a 30 ton reduction in CO2 emissions. The body of this sports car is made of carbon fibre reinforced plastic, and has an even higher proportion of plastic than an ordinary car.

Without plastic, transportation costs for the retail industry would increase by 50%. On average, plastic packaging accounts for between 1 - 4% by weight of all products packaged in plastic. For example, a film that weighs 2g is used to pack 200g of cheese, and a plastic bottle weighing 35g packs 1.5 litres of drink. If you also include containers and shipping material, then plastic packaging increases its share to 3.6% on average.



Fig 113. A 330ml glass Coca-Cola bottle weighs 784g when full, and 430g empty (including the lid) i.e. 55% of the product weight is in the packaging. By comparison, a 500ml bottle in PET is 554g when full and just 24g when empty (incl. lid) i.e. only 4% of the weight is packaging.

Plastic also has many uses in climate-friendly energy production. For example, the wings of wind turbines are made of vinyl ester with internal PVC foam; pipes in solar collectors are made from polyphenylsulphone; and the casings for fuel cells are manufactured out of polyetherimide.

Chapter 8 – Modification of polymers

This chapter describes the polymerization of thermoplastics and how to control their properties by using various additives.



Fig 123. 95% of all the plastics produced are based on natural gas and oil. The remaining 5% comes from renewable sources i.e. plants. In 2010 plastics accounted for about 4% of the total oil consumption, as follows:

• Heating	35%
• Transport	29%
• Energy	22%
• Plastic materials	4%
• Rubber materials	2%
• Chemicals and medicine	1%
• Other	7%

Polymerization

The polymerization of monomers obtained by cracking of oil or natural gas creates polymers (synthetic materials) that can be either plastic or rubber. The type of monomer determines which type of material you get, while the polymerisation process itself can create different variations of the molecular chains such as linear or branched as shown below.

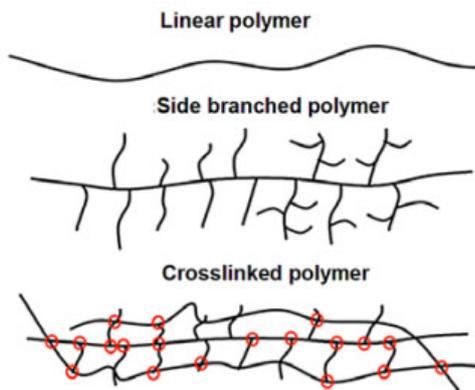


Figure 124. Polymerization of ethylene can produce different variants of polyethylene. LLDPE is made up of linear chains like the one at the top of the figure. LDPE has a branched chain structure, as shown in the middle. And PEX has cross-linked chains, i.e. where there are molecular bonds between the chains, as shown at the bottom.

If a polymer is made up of a single monomer it is called a homopolymer. If there are more monomers in the chain it is called a copolymer. Acetal and polypropylene are resins that can occur in both these variations. The copolymer group (the second monomer) is mainly located after the main monomer in the chain. In the case of acetal there are about 40 main monomers between every copolymer group. The copolymer may also occur as a side branch in the main chain, in which case, it is known as a graft copolymer.

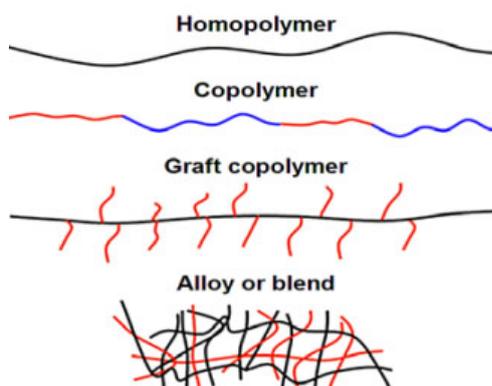


Figure 125. At the top we see the linear chain of a pure polymer, such as polypropylene. By adding ethylene you get a polypropylene copolymer with a block structure according to the second chain from above. This material has much better impact resistance than normal polypropylene.

By adding EPDM (rubber monomer) you get a graft polymer with a chain structure, and a material with extremely high impact strength.

One can also create a copolymer by mixing the granules from different polymers. In this case, the material is known as an alloy or blend. ABS + PC are examples of this type of copolymer.

Chapter 9 – Material data and measurements

In this chapter we will go through those properties of thermoplastics that often are requested by designers and product developers when they are looking for a material in a new product in plastic or when they must meet different industry or regulatory requirements, such as electrical or fire classification.

When plastics manufacturer develops a new plastic grade they usually also publish a data sheet of material properties. Sometimes this is done as a "Preliminary data sheet" with a few properties and then if it is decided that the product should be a standard grade in a more comprehensive data sheet. Many suppliers publish their material grades in the Campus or Ides materials databases on the Internet, which can be used free of charge (see next chapter).



Fig 147. What are the different requirements from authorities on a so unremarkable product as an electrical outlet that must be fulfilled to be sold on the market?

E.g. Campus is very comprehensive and can describe a material with over 60 different data and at the same time you can get graphs (e.g. stress / strain curves) and chemical resistance to many chemicals. The most requested data when it comes to thermoplastics and also usually occur in the "Preliminary data sheet" are:

- Tensile or flexural modulus
- Tensile strength
- Elongation
- Impact strength
- Maximum service temperature
- Flame resistant classification
- Electrical properties
- Rheology (flow properties)
- Shrinkage
- Density

Tensile strength and stiffness

Stiffness, tensile strength and toughness in terms of elongation can be obtained by the curves in tensile testing of test bars.



Fig 148. The picture shows a test bar in a tensile tester. All plastics manufacturers measure the mechanical properties on specimens manufactured according to various ISO standards, which makes it possible to compare data between different manufacturers. Photo: DuPont

Product Information			
 Delrin® acetal resin			
PRELIMINARY DATA			
Delrin® 500LM BKL01			
Delrin® 500LM is a medium viscosity grade, black pigmented, with good laser markability.			
Property	Test Method	Units	Value
Mechanical			
Yield Stress	ISO 527-2:2	MPa	70
Stress at Break	ISO 527-2:2	%	12
Yield Strain	ISO 527-2:2	%	22
Strain at Break	ISO 527-2:2	%	35
Tensile Modulus	ISO 527-2:2	MPa	3400
Charpy Impact	ISO 179/16A	kJ/m ²	6
Charpy Impact	ISO 179/16E	kJ/m ²	270
Thermal			
Molding Temperature	ISO 3140C	°C	177
Other			
Density	ISO 1183	kg/m ³	1420
Moulding Shrinkage	ISO 294-4	%	1.5-2.0
Flammability			UL-94 V-0
Processing			
Melt Temperature Range		°C	210-220
Mould Temperature Range		°C	80-100
Drying Time		h	2
Drying Temperature		°C	80
Shrinkage Range		Max	70-100

© 2008 DuPont Engineering Polymers. All rights reserved. DuPont Engineering Polymers is a registered trademark of DuPont Engineering Polymers. Delrin® is a registered trademark of DuPont Engineering Polymers. ISO 527-2:2, ISO 179/16A, ISO 179/16E, ISO 3140C, ISO 1183, ISO 294-4, UL-94 V-0 are trademarks of International Organization for Standardization (ISO) or Underwriters Laboratories (UL).

Start with DuPont Engineering Polymers - www.dupont.com/engpolymers

Fig 149. In a "Preliminary data sheet" only a few data are shown compared with the data sheets that occur in so-called standard grades or in the Campus material database.

In the data sheet above which describes an acetal from DuPont 16 different data divided into the following groups are shown:

- Mechanical
- Thermal
- Other (Density and mould shrinkage)
- Processing

Source: DuPont

Chapter 10 – Material databases on the Internet

A good way to find information about different plastic materials is visiting the raw materials producer's websites or visit independent material databases on the Internet. In this chapter you will find three leading global databases: Campus and Material Data Center from the European company M-Base and Prospector Materials Database from the U.S. company UL IDES. The great advantage of all the databases is that you can compare the material data no matter who the producer is, as all the materials in the databases are tested in exactly the same way.

Campus

About 20 large plastics raw materials producers use Campus to inform their customers about their products. Software for Campus 5.2 is offered free by the producers, and can be downloaded directly via the Internet: www.campusplastics.com

The database is updated regularly and can be updated via the campus website.

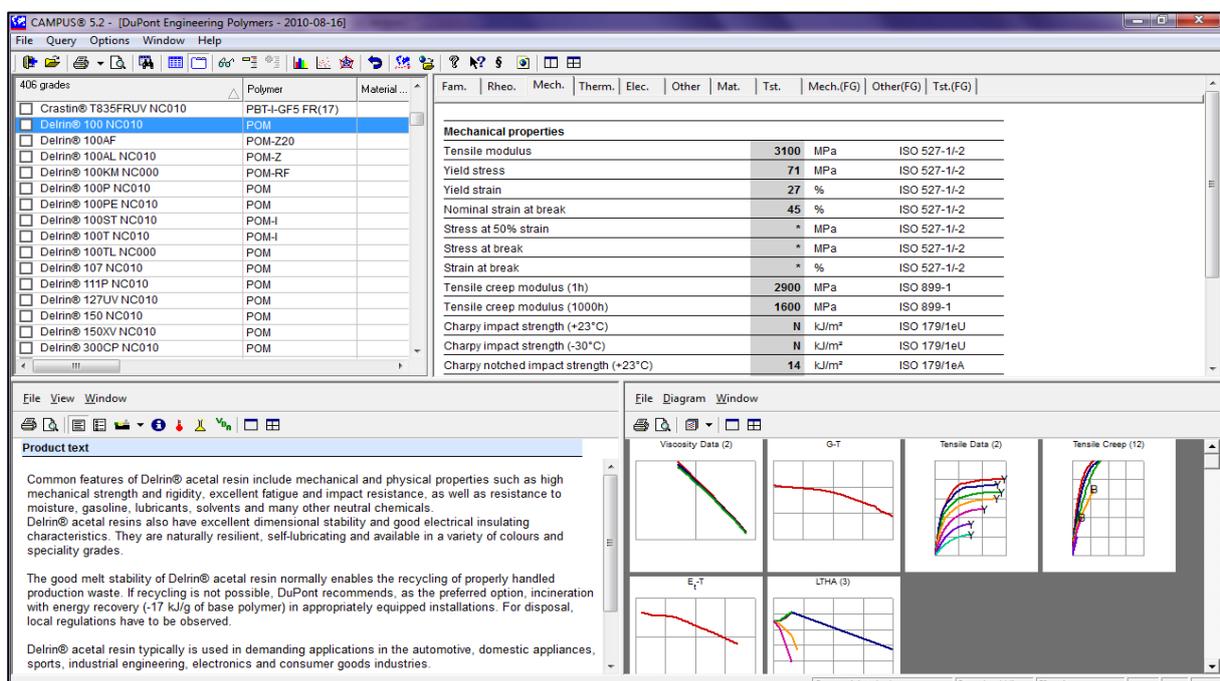


Fig 165. The Campus window consists of four smaller windows. The top left is the list of all the materials. the top right is the properties window, which in this case shows the mechanical properties of the selected grade (Delrin 100 by DuPont). The bottom left is the information window with the information about Delrin 100 and to the right we see the different curves for this material in the graphics window.

Properties of Campus 5.2

- + The database is free for downloading on the Internet
- + You can sort the properties in tables
- + You can compare different materials in a tabular form
- + You can compare different materials graphically
- + You can get chemical resistance for the materials
- + You can specify and print your "own" data sheet
- + You can search for materials meeting various criteria on properties
- + You can get the materials process data in "curve overlay" - and "polar" charts
- + You can get the material's flow properties (to be used in mould flow simulations)
- You can only compare materials from one specified material producer at the same time
- The database must be updated manually

Chapter 11 – Test methods for plastic raw materials and mouldings

In this chapter we will describe the plastic raw material producer's quality control of plastic raw materials, various material defects which a moulder may find as well as the test methods you can use when you want to analyze these defects.

Quality control during the raw material production

The plastic producers measure the quality of their plastic raw material at regular intervals (random sampling). Depending on the type of polymer and the included additives they use different test methods in the production. In general they are testing:

- Viscosity, which is dependent on the molecular chain length.
- Fibre content, i.e. the ash content after complete combustion of the polymer.
- Moisture content of each batch at the packing station.

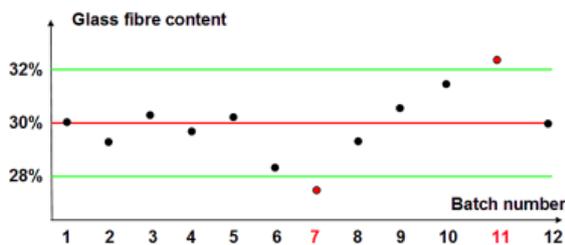


Fig 171. Here we can see the test results of 12 different batches of a 30% glass fibre reinforced grade. The aim is to be as close as possible to 30%, but as long as the result is within the green lines ($30 \pm 2\%$), the material is approved for delivery. Batch 7 and 11 are not acceptable and must be reworked in order to fall within the delivery limits.

Test method (unit)	ISO	Specified.
A Moisture content (%)	15512	≤ 0.20
A Ash content (%)	3451	31 – 35
B Melting point (°C)	3146	250 – 265
B Density (g/cm ³)	1183	1.34 – 1.41
B Tensile strength (MPa)	527	≥ 157
B Elongation (%)	527	≥ 1.8
B Stiffness – E-modulus (MPa)	527	≥ 8000
B Impact strength Charpy (KJ/m ²)	179	≥ 7.8
B HDT (1.80 MPa)	D789	≥ 245

A : Every batch, **B** : Annually

Fig 172. In the table to the left we can see that thermal and mechanical properties are tested at least once a year.

These values are then used for the published values in the producer's literature or in databases. It is only in exceptional cases that moulders can get their material regularly tested with these types of testing.

The test values that the producers receive during the random sampling of the various production batches will as a rule be attached together with the material (or invoice) in the form of a delivery certificate. In this certificate you will find the same lot number (also called batch number) that you will find stamped on the bags or octabins. It is very important to keep these certificates in case of a complaint as the production plants always want to know which batch it is.

Fig 173. To the right you can see a delivery certificate from DSM for Akulon K224-G6 (natural PA6 with 30% glass fibre).

Here they have measured:

- A moisture content of 0.050% and indicated the upper delivery limit to 0.150%.
- An ash content (glass fibre content) of 29.9% and indicated the limits of supply to be between 28.0% and 32.0%.
- A relative viscosity in a solution of formic acid of 2.45 which is well within the tolerance limits.

DSM Engineering Plastics B.V.



Insp. certificate "3.1" EN 10204 Page 1 / 1

Material: Our / Your reference
0000019277 K224-G6|99.99.99.171104 / 110-2372

Brandname: AKULON®

Batch 1150341606 / Quantity 22.000 KG

Inspection lot 40000214809 from 07.09.2011

Characteristic	Unit	Value	Lower Limit	Upper Limit	Method
Moisture	%	0,050	0,000	0,150	ISO 15512
Ash	%	29,9	28,0	32,0	ISO 03451
Relative viscosity	-	2,45	2,20	2,60	DSM Method (90% HCOOH)

Chapter 12 – Injection moulding methods

History

Injection moulding is the predominant processing method for plastics, allowing the production of parts in both thermoplastics and thermosets. In this chapter, however, we focus on injection moulding for thermoplastics.

The method was patented in the U.S. back in 1872 by the Hyatt brothers who began producing billiard balls in celluloid. The first moulding machines were piston machines where the plastic material was filled in a heated cylinder. Once the plastic is thus melted, it is pressed into a cavity by means of the piston. The first screw machines, i.e. the type used today, were not introduced until the 1950s.

Injection moulding has become the most popular machining process for thermoplastics today because it provides such great cost advantages over conventional machining or other casting methods. The process has also undergone great development in the last fifty years and is now completely computerized.



Fig 194. The picture shows an old piston injection moulding machine. The locking mechanism was a knee-joint type which is commonly used even today, but the locking and opening movements required arm muscles to operate the levers.



Fig 195. A modern injection moulding machine manufactured by Engel. This machine has a hydraulic locking mechanism. You can also get "all-electric" machines which are significantly quieter than the hydraulic ones. Photo: Engel

Properties

Injection moulding is a completely automated process which often produces finished components in one go. In addition:

- + The components can be very complex in shape without any need for post-operations
- + It has a very high production rate (in extreme cases, with thin-walled packaging, a cycle time of only 3-4 seconds)
- + It can manufacture everything - from millimetre precision parts (e.g. gears in watches to large body parts for trucks, with lengths over 2 m)
- + It can fabricate really thin walls of just a few tenths of a millimetre, or thicker up to 20 mm
- + Several different plastic materials can be combined by co-injection in the same shot (e.g. a soft grip on a rigid handle)
- + Metal parts can be overmoulded (see Fig 196 on next page)
- + Components with so-called Class A surfaces (see Fig 197), can be produced, suitable to paint or chrome-plate as often seen on cars
- + Automated post processing operations can easily be made - such as removing gates and runners, assembling (e.g. welding) or surface coating the components
- + Runners or rejected components can be directly recycled at the injection moulding machine

Chapter 13 – Post moulding operations

Surface treatment of mouldings

Generally, you get completely finished parts when performing injection mouldings. Parts with the correct colour being ready to be used immediately or ready to be assembled with other components. However, there are opportunities to further enhance improvements of the injection moulded part by surface treatment. Usually surface treatments are made to improve the aesthetic value but may sometimes be required to meet the functional needs.



Fig 211. A headlamp housing made in PBT.

In this picture you can see the chrome plated reflector through the glass (that has been made in polycarbonate). The surface treatment has been made in order to get the optic properties as well as adding protection to the surface from the high heat generating light sources.

The various surface treatment methods used for thermoplastics that we will cover are:

- Printing/labeling
- IMD – In mould decoration
- Laser marking
- Painting
- Chrome plating or metallizing

Printing

There are many different reasons for printing on plastic products. You often want to add a label or add instructions onto the surface of the product. The printing methods that we will describe in this chapter are:

- Hot stamping
- Tampon printing
- Screen printing



Fig 212. Containers, cans and bottles with labels and instructions added to the surface. On many of these an adhesive label in either paper or plastic foil has been attached.

There are also various methods to print directly on the plastic surface.

Chapter 14 – Different types of moulds

In this chapter we will cover different types of moulds, and in the next chapter, we will look at them in more detail. If you ask an operator within the moulding business what types of moulds are commonly used their likely reply is: "Common moulds and hot runner moulds." Hot runner moulds will be discussed in the next chapter. What the operator probably means by "common moulds" is shown below:

- Conventional two plate moulds
- Three plate moulds
- Moulds with slides
- Moulds with rotating cores for parts with inner threads
- Stack moulds
- Moulds with ejection from the fixed half
- Family moulds
- Multi-component moulds
- Moulds with melt cores

The list covers most of the common types of moulds but does not claim to be complete. In most of the above types, you can also choose between either cold or hot runner systems for the moulds.

Two plate moulds

Two plate moulds are the most common type of moulds for injection moulding.

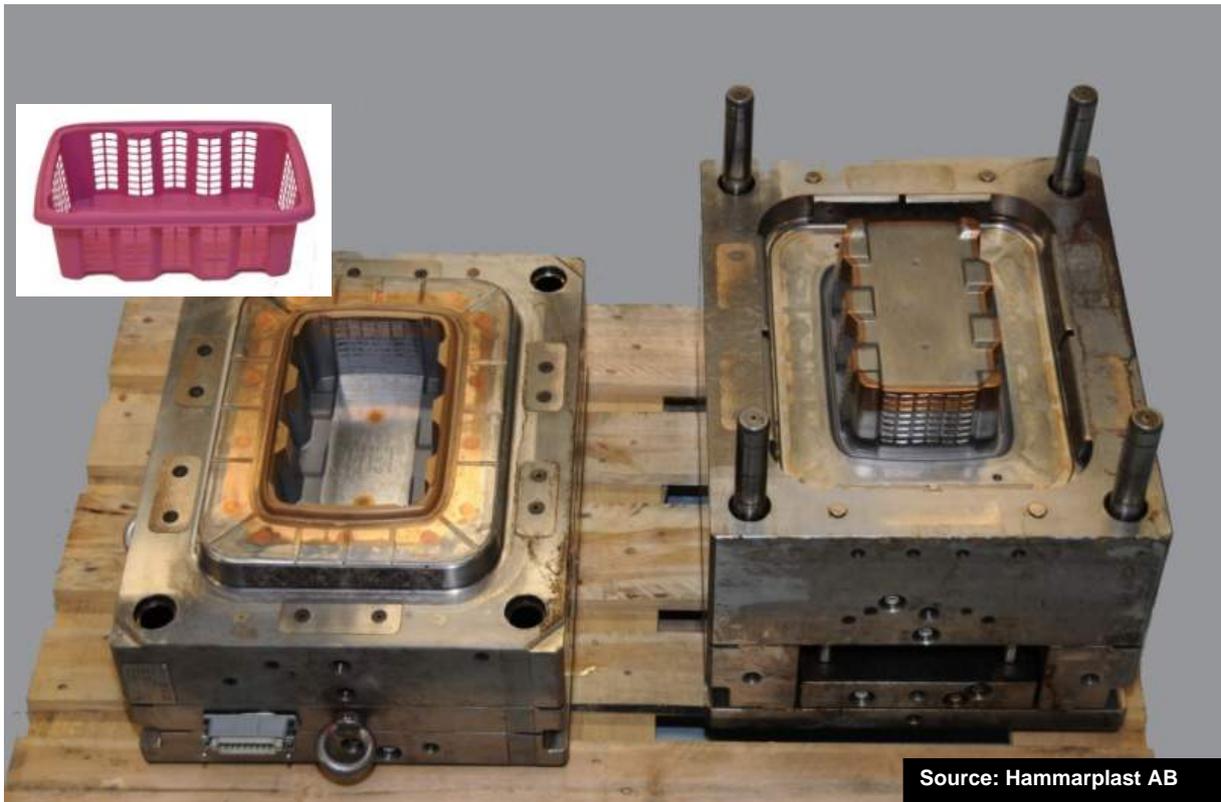


Fig 223. Here is an example of a two plate mould with one cavity used to manufacture the basket shown in the picture at the top left corner. It is easy to see that the right half is the movable one, since the ejector plate (bottom) can be seen here. The left half is fixed, and has a hot runner system integrated. The four columns are used to center the mould halves together.

Chapter 15 – Structure of moulds


In this chapter we will focus on how a common two plate mould is constructed.

We will look at the following:

- A. The function of the mould
- B. Runner systems – cold runners
- C. Runner systems – hot runner
- D. Cold slug pockets/pullers
- E. Tempering and cooling systems
- F. Venting systems
- G. Ejector systems
- H. Draft angles

Figure 234. To the right is a schematic diagram of the structure of a two plate mould.

- ① shows the nozzle centering of the tool.
- ② shows the sprue and the channel between the nozzle of the cylinder and the runner.
- ③ shows the runner that leads the material through the gate into the cavities.
- ④ shows the gate that leads the material into the cavity.
- ⑤ is the cold slug pocket. ⑥ is the cooling systems.
- ⑦ shows the ejector system.
- ⑧ shows the venting and ⑨ shows that the part has a draft angle.

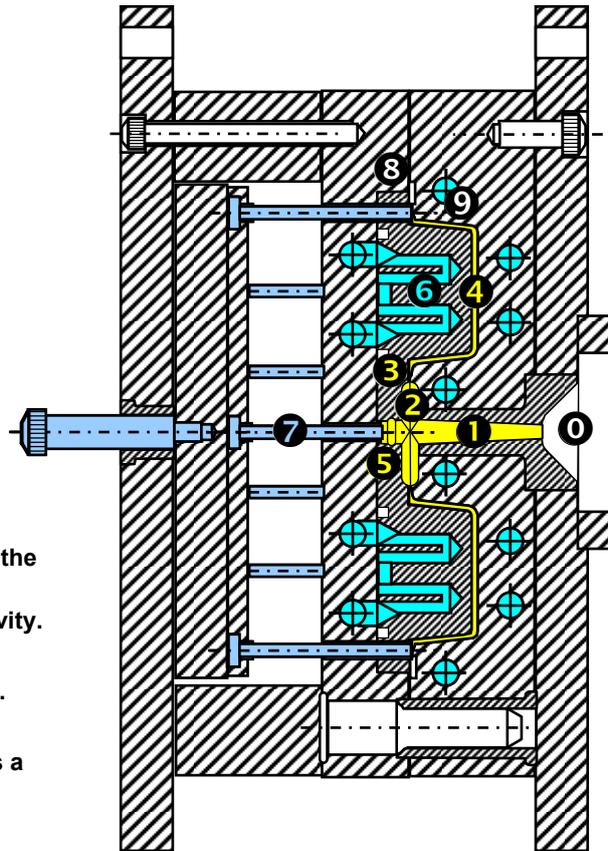

A. The function of the mould

There are many demands on a mould in order to obtain high quality products:

- The dimensions have to be correct
- Filling of the cavities has to be shear free
- Good venting is necessary during the filling process
- Controlled cooling of the plastic melt in order to obtain correct structure of the material.
- Warp free ejection of the part

B. Runner systems – cold runners

The cold slug pocket system can be divided into different parts:

1. The sprue
2. The runners
3. The gate

The sprue ① shown on the right is the connection between the cylinder nozzle and the runners ② of the mould. In most cases, it has a conical shape in order to avoid that it sticks in the mould when it has been packed. The sprue should be easy to pull out from the fixed half when the mould is opened at the end of the injection moulding cycle. For some semi-crystalline materials such as acetal the sprue can be completely cylindrical in its shape. The dimensions of the nozzle should be adjusted with a diameter of about 1 mm less than the smallest diameter of the sprue.

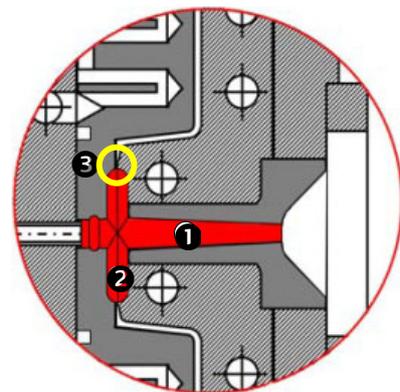


Fig 235. Above is the runner system. ① is the sprue, ② is the runner and ③ shows the location of the gate.

Chapter 16 – Mould design and product quality

In Chapter 11 problems that may occur on injection moulded parts due to defects in the plastic raw material are described. In this chapter we will look at problems due either to badly designed moulds or improper part design. In chapter 28 we will describe process-related problems.

Mould related problems

These types of problems are not always as easy to detect by visual inspection as material or process related problems are. Many of these problems are only discovered when the parts are mechanically tested or when the parts break under normal stress loads.

Below are some common problems due to:

- Too weak mould plates
- Incorrect sprue/nozzle design
- Incorrect runner design
- Incorrectly designed, located or missing cold slug pocket
- Incorrect gate design
- Incorrect venting
- Incorrect mould temperature management

Too weak mould plates

If you get a flash around the sprue or runners during the injection phase, it may indicate too high injection speed, too low lock pressure on the machine or the too weak mould plates.

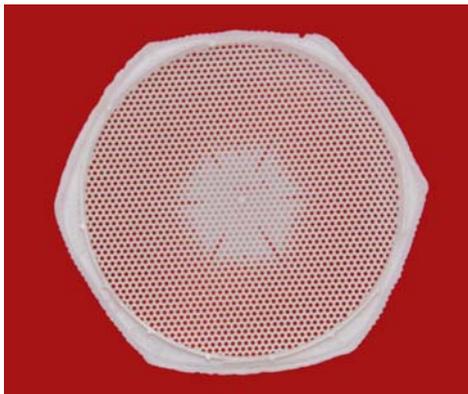


Fig 252. In the picture to the left a fan shroud in acetal is shown.

The gate is in the middle and it is clear that the mould plate has become deformed so that a flash around the gate has formed even though the cavity is not completely filled. Moving the mould to a larger machine with higher clamping force does not help in this case.

In the case above the problem was first tried to be solved by choosing an acetal grade with a lower viscosity. However, this did not solve the problem entirely (see the figure below to the left). Another option to solve the problem would have been to increase the wall thickness of the shroud or by changing the grid thickness in the round hole. Neither of these solutions were chosen, instead a solution using flow directors was used. The wall thickness was increased by using a honeycomb pattern (as shown on the figure below to the right).



Fig 253. A less viscous grade of acetal with a slightly less impact resistant was chosen to fill the fan shroud entirely but still flash in the middle could not be avoided.

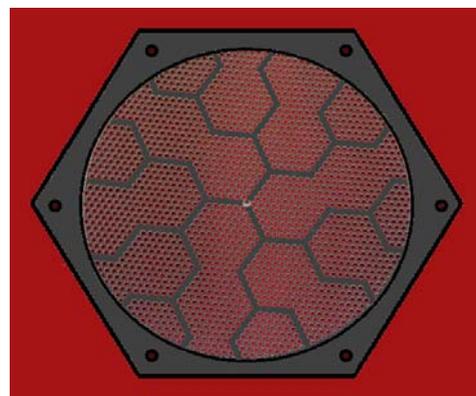


Fig 254. By applying a pattern of flow directors one succeeded to fill the shroud without getting the flash in the middle, nor did the cycle time need to be extended.

Chapter 17 – Prototype moulds and mould filling analysis

In the previous chapter we described various errors that depend either due to an incorrect part or mould design.

When designing new parts or starting the moulding of a new product you will get a number of new questions and challenges:

- Will the part get the correct dimensions?
- Will it warp?
- Are the runners too long? Will the part be completely filled?
- Where should the gate be placed in order to make the part as strong as possible?
- Are the temperature control channels correctly dimensioned and located?

Prototype moulds

In order to avoid unpleasant surprises when starting the production in a new mould you can use a prototype mould to see what the part would look like once it has been moulded. Another option is to complete only one of several cavities in a production mould. These procedures could save both money and time. But they are not always completely reliable as runners and mould temperature systems seldom correspond to the final production mould. Producers are using prototype moulds when the plastic part is very complex or when the production mould is very expensive. Within the automotive industry these kinds of moulds are sometimes named “soft moulds” as they often are made in aluminum or in soft steel. When it comes to more simple part or mould design most prototypes have been replaced by a mould filling analysis.



Fig 263. Above is a prototype mould (highlighted in red) in aluminum for the cams shown in the figure to the right. Here only one part is made in each shot. Below is the production mould in steel with 16 cavities. This mould is about 30 times more expensive to produce compared to the prototype mould in aluminum.



Fig 264. Here we can see a common and component used in assembly of furnitures. AD-Plast in Sweden developed this component in PPA with glass. They won the prestigious price “Plastovationer 2009” by successfully replacing metal with plastic. The cam is stronger than the former zinc one without needing to change the outer dimensions.

Source:AD-Plast AB

Mould filling analysis

Mould filling analysis is a computer-based tool that facilitates the ability to get accurate plastic parts in less time when producing a new part or modifying an existing mould.



Fig 265. On the image you can see a mould designer in front of his PC working with Moldflow, a mould filling software. Many of these softwares are able to run on standard PCs but they require a lot of computing power. In order for the calculations to run as fast as possible it is necessary to have a large internal memory as well as a fast processor.

Chapter 18 – Rapid prototyping and additive manufacturing

In the previous chapter we described various prototype tools. In this chapter we will look at methods used to produce prototypes or small production series without use of moulds made in metal.

Prototypes

The reason for using a prototype or model during the development process of a new product is that it:

- Shortens the development time so that the marketing process can start earlier
- Often facilitates communication between parties during the development process
- Enables opportunity to test various functions and/or interactions with other components
- Emotionally and physically can't be fully replaced by virtual models



Fig 279. Before computers were used in the development process of new products, prototypes and models were hand made. The picture to the left was taken at the Naval Museum in Karlskrona, Sweden. Here two admirals in the navy in 1779 make the decision to build a new battle ship using a very detailed wooden model.

Producing models is something that humans have done throughout history. Most kids today get their first contact with models by playing with Lego or modeling clay. The advanced computerized technology of 3D-manufacturing used today was developed in the late 1980s and have taken steps through CAD / CAE / CAM / CNC.

Which technique you choose depends entirely on the complexity of the part. If it is a part with simple geometry it is usually cheaper to produce it using cutting methods such as milling, laser or water cutting. If the part is more complex, rapid prototyping (additive technology) may be the only possible solution or a much cheaper solution compared to cutting techniques even if the material is significantly more expensive (about 50 SEK/kg of plates in polyamide and 3 000 SEK/kg for photopolymer in the SLA method). However, you must take into account that the production of milled models requires removal of up to 90% of the material while the amount of material waste when using rapid prototyping is negligible.

Rapid prototyping (RP)

This kind of additive technology is fairly new and goes under a variety of names. When performing a search the following terms may be helpful: *Rapid prototyping (RP)*, *Rapid tooling (RT)*, *Rapid application development (RAD)*, *Additive Manufacturing (AM)* or *3D printing*.

We will take a look at the following methods:

- 1) SLA – Stereolithography
- 2) SLS – Selective Laser Sintering
- 3) FDM – Fused Deposition Modelling
- 4) 3DP – Three Dimensional Printing
- 5) Pjet – PolyJet

Chapter 19 – Cost calculations for mouldings

Most moulders use advanced computer-based softwares to calculate costs or post costs of injection molded parts. Unfortunately, it is very seldom that injection machine setters have insight into or get the opportunity to use these softwares, even though they have great potential to affect the costs by adjusting the injection moulding parameters.

How often does it not happen that the setter adds a few seconds of extra cooling time when experiencing a temporary disturbance of the injection moulding cycle? And then forgetting to change the settings back, before the settings are saved for the next time the tool is to be put up. Those extra seconds can mean thousands of Euros in unnecessary production costs per year and may also reduce the company's competitiveness.

The purpose of this chapter is to show how a fairly detailed cost estimate for injection moulded parts is constructed. The setter also gets a tool that enables him/her to see how changes that are made can influence the cost of the moulded part. This tool is based on Microsoft Excel and is available for downloading at www.brucon.se. The user does not need any extensive knowledge of Excel in order to fill in the input values required to immediately obtain the final cost picture at the bottom of the page.

The rest of this chapter will explain how to use the Excel file and what the different input values mean.

When you open the file called Costcalculator.xls you must first make a copy of this file to your computer's hard drive, otherwise the macro functions won't work. Depending on how the default values are set for your own Excel program it may be necessary to make modifications of the security settings. Detailed information of how this is to be done is also to be found on the author's homepage. The file is also a "read-only file" so it should be saved under a different name once you have completed it.

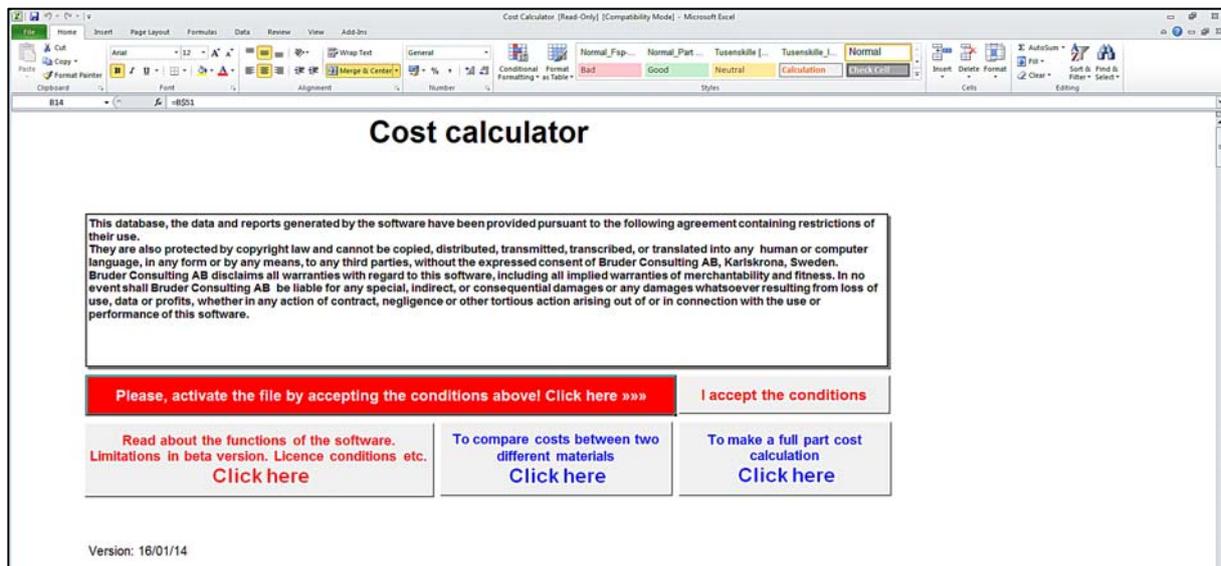


Fig 313. The start menu once the Excel file has been opened.

There are three different functions to choose between:

- 1) Read about the functions of the software
- 2) Compare the costs between two different materials
- 3) Make a full part cost calculation

Before you click on the key "I accept the conditions" you are only able to read about the files various functions. The two other keys will only display blank pages.



Fig 314. Once you have clicked on "I accept the conditions" the file is activated and the line above is displayed.

Chapter 20 – Alternative processing methods for thermoplastics

Blow moulding

Blow moulding is a fully automated process that produces hollow products from thermoplastic. There are two main variants. The first involves extrusion of a hollow tube, known as a “parison”, into a cavity between two mould halves (see the figure below). In the second, an injection moulded “preform” is heated and blown into the cavity (see the figure at the bottom of the page). Most PET soft drink bottles are produced in this way.

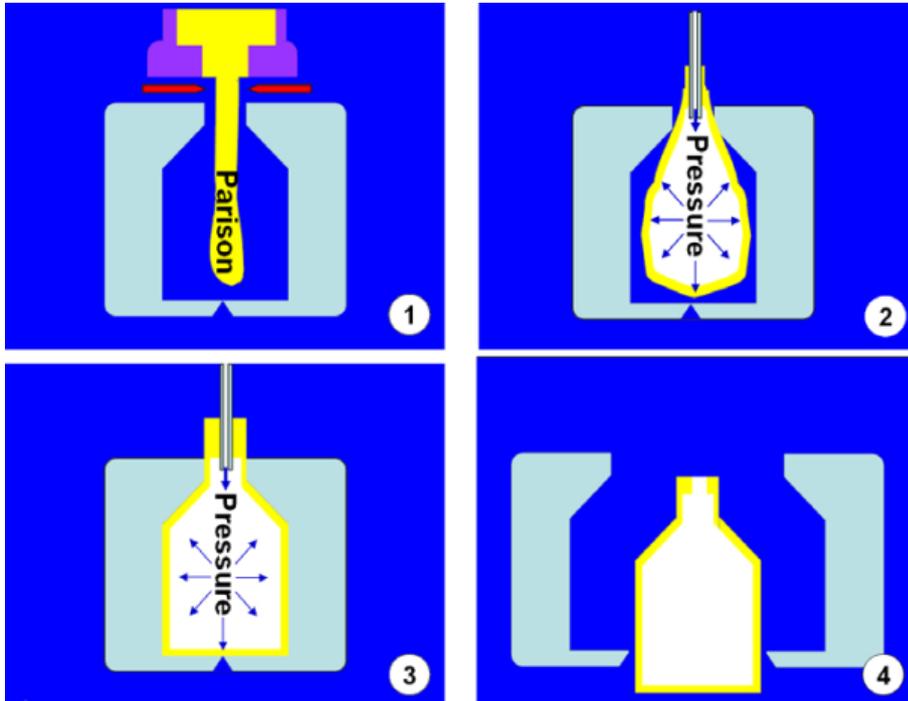


Fig 322. Blow moulding with parison

Picture ❶ shows the extruded tube coming through the extruder head into the cavity.

In picture ❷ the mould has been moved to the next station, where the tube is blown out towards the walls of the cavity using compressed air.

In picture ❸ the tube has been completely pressed out against the cavity walls and allowed to cool.

Picture ❹ shows the finished part being ejected from the mould.

As a rule, only special grades with relatively high viscosity are used for blow moulding e.g. PE, PP, PVC, PET, PA and some thermoplastic elastomers.

Multiple extruders can be used for different layers of the parison, for example to improve the barrier properties of a product. The hose can also be extruded in sequence, e.g. soft segments alternating with rigid ones to produce rigid tubes with integrated soft bellows.

Chapter 21 – Material selection process

A major responsibility of designers and project engineers is selecting the right material for their applications. When materials under consideration include plastics, this task is particularly difficult, since there are hundreds of different polymers and thousands of different plastic qualities to choose from. Finding the right material requires knowledge, experience (your own or access to that of others) and sometimes a little luck.

If you choose a material that is considered "somewhat too good", this will usually be reflected in the cost being seen as "somewhat too high" which can have an effect on your competitiveness. However, on the other hand, if you choose a material of a "borderline" quality, you run the risk of complaints and a bad reputation in the marketplace, which also affects your competitiveness.

How do you select the right material in your development project?

Let's take a new iron as an example. Before the designer starts thinking about what materials to use in the iron, he must be clear about the following:

- What should the new iron look like?
- What different functions should it have?
- What will it cost?

When answering the above questions, the designer should make a list of the requirement specifications, as detailed as possible.



Development cooperation

A good way to reduce development time when it comes to plastic components is to utilize the collective expertise and experience of a project team consisting of its own development department working with a potential material supplier and potential manufacturers (e.g. moulder and mould maker).

Establishing the Requirement Specifications

To establish a complete requirement specification from scratch is very difficult. As a rule, one always encounters new challenges in development work. The requirements can be divided into categories:

1. Market requirements:
 - New functionalities
 - Regulatory requirements
 - Competitive situation
 - Cost objectives
2. Functionality requirements:
 - Integration of multiple functions in the same component
 - Different assembly methods
 - Surface treatments
3. Environmental requirements:
 - Chemical restrictions
 - Recycling (easy to disassemble and to sort)
4. Manufacturing requirements:
 - Processing methods (e.g. injection moulding)
 - Moulding equipment

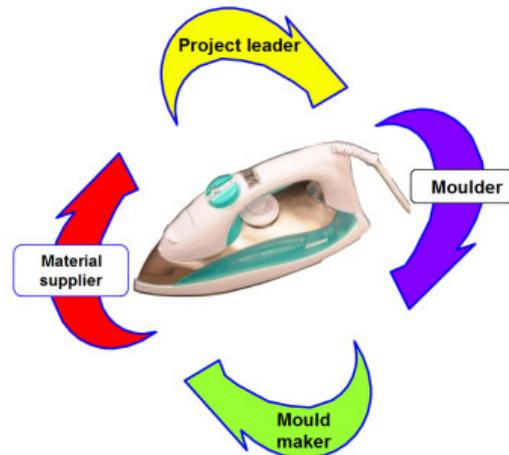


Fig 406. Successful collaboration with project subcontractors generally shortens development time significantly.

Chap 22 – Requirements and specification for plastic products

The requirement specification will differ from product to product depending on what it will be used for. For a spatula, heat resistance and food approval are key requirements; for the blade to an indoor hockey stick, toughness and the ability to shape the blade afterwards are the most important properties. This section will address most of the properties that should be included in the requirement specifications of thermoplastic products. It is important to bear in mind that the tougher the requirements for a product, the more expensive it becomes to manufacture.

Below is a list of the different things that need to be considered when drawing up the requirement specification for a new plastic product:

1. Background information
2. Batch size
3. Part size
4. Tolerance requirements
5. Part design
6. Assembly requirements
7. Mechanical load
8. Chemical resistance
9. Electrical properties
10. Environmental impact
11. Colour
12. Surface properties
13. Other properties
14. Regulatory requirements
15. Recycling
16. Costs

1. Background information

This generally refers to a description of the product and its intended usage, and is often defined by the following questions:

- Have we developed a similar product?
- What new features will the product have?
- Is this just a new size (up-scaling/down-scaling) of an existing product?
- Can we modify the geometry of an existing product to create this new one?
- Does the new product require a radical change of materials?
- How do the competitors' products work?
- What tests, studies or reports already exist regarding this type of product?

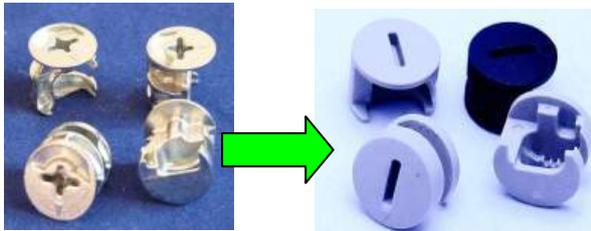


Fig 343. The picture on the left shows a zinc cam (furniture assembly screw). The cam in the picture on the right has the same dimensions but there has been a radical change to the material used: i.e. polyamide instead of zinc.



Fig 344. The picture above shows various sealing clips made by Weland Medical AB in Smålandsstenar, Sweden.

Working from the left, clips 3-6 are purely upscaled/downscaled versions of the same product, whereas the other three clips have different geometries.



Fig 345. When collecting background information for the development of a new product, it is common to compare existing products on the market to try to find possible improvements, new functions or lower production costs than your competitors.


Chapter 23 – Design rules for thermoplastic mouldings

Designing in plastic is a science in itself and a lot has been written on the subject. This chapter aims to show some of the most important rules that a designer should bear in mind when developing a new product in plastic. These rules are divided into the following ten sections:

1. Remember that plastics are not metals
2. Consider the specific characteristics of plastics
3. Design with regards to future recycling
4. Integrate several functions into one component
5. Maintain an even wall thickness
6. Avoid sharp corners
7. Use ribs to increase stiffness
8. Be careful with gate location and dimensions
9. Avoid tight tolerances
10. Choose a suitable assembly method

Fig 380. There are some good design literature online available for free download. One such document is "General Design Principles for DuPont Engineering Polymers" containing 136 pages of useful information.

See: plastics.dupont.com/plastics/pdflit/americas/general/H76838.pdf

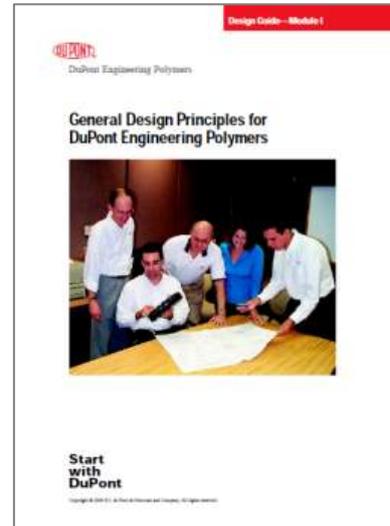

Rule 1 – Remember that plastics are not metals

Some engineers still design plastic components as if they were made of metal. If you can succeed in maintaining the strength, the product will be lighter and often much cheaper. However, if the main purpose is to reduce production costs, it is by default necessary to make a total redesign when plastic is intended to replace metal.

If a direct comparison is made, the metal will have a higher:

- Density
- Maximum service temperature
- Stiffness and strength
- Electric conductivity

While the plastic materials has an increased:

- Mechanical damping
- Heat expansion
- Elongation and toughness

	Metals	Thermoplastics	Thermosets
Weight	↔	↑↑	↑
Corrosion	↔	↑	↑
Stiffness	↔	↓↓	↓
Strength	↔	↓↓	↓
Temperature	↔	↓↓	↓
Thermal insulation	↔	↑	↑
Electric insulation	↔	↑	↑
Freedom of design	↔	↑↑	↑
Recycling	↔	↑	↓

↔ Reference / equal ↑ Better ↓ Worse

Fig 381. This table shows that thermoplastics have certain advantages over metals, such as decreased weight, corrosion durability, thermal and electric insulation, freedom of design and recycling potential.

However, they are clearly disadvantaged in terms of stiffness, strength and sensitivity to high temperature. Thermosets follow the same patterns as thermoplastics but are much harder to recycle.

Chapter 24 – Assembly methods for thermoplastics

Most designers seek to make their plastic products as simple as possible whilst at the same time integrating all the necessary functions. The product should preferably come out of the mould complete and ready, but sometimes – for functionality or cost purposes – it can be necessary to make the product in two or more parts that are assembled at a later stage.

There are several assembly methods for thermoplastic products, and this chapter considers most of them. To begin with, it is common to divide the assembly methods into those where the product can be disassembled and reassembled several times (e.g. using screw joints) and those permanent methods, whereby components are assembled only once (e.g. welding).

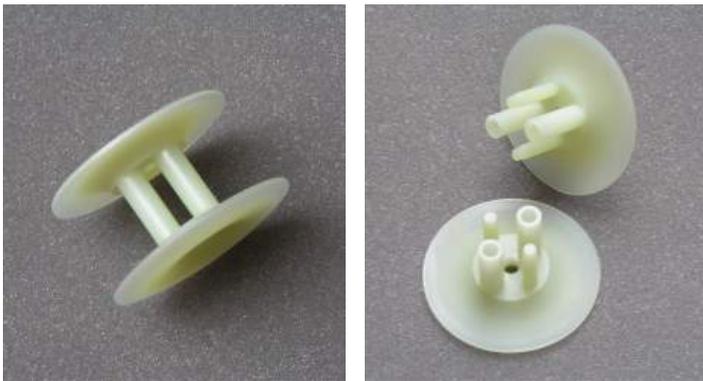


Fig 419 and 420. This bobbin is made as two identical halves in an mould with a simple parting line. The halves are then rotated 90° in relation to each other and then joined together by press-fitting.

Assembly methods that facilitate disassembly

Among the dismountable methods, the following methods are usually used when it comes to plastic details:

- Self-tapping screws
- Threaded inserts
- Screw joints (with an integrated thread)
- Snap-fits (specifically designed to allow disassembly)



Fig 421. If a good screw joint is required for a self-tapping screw, the plastic material should have a stiffness lower than 2800 MPa (i.e. the same as for POM). For stiffer materials (e.g. glass fibre reinforced), a threaded hole or threaded inserts is recommended. It is also important to use a self-tapping screw that is specifically developed for plastic materials.



Fig 422 and 423. Above to the left is a threaded brass bushing in the wall of a pump housing made in glass reinforced polyamide 66. The bushing can either be over-moulded or pressed into the plastic wall.

The plastic caps on the plastic bottles in the picture to the right are a typical example of a screw joint with integrated threads.

Chapter 25 – The injection moulding process

Moulding processing analysis

In this chapter, we will go through the main injection moulding parameters that affect the quality of the mouldings. We will also emphasize the value of working systematically and have a good documentation.

To the right is a document called "Injection moulding process analysis". There is an Excel file that can be downloaded at: www.brucon.se. On this sheet we can record most of the parameters that need to be documented to describe the injection moulding process for a moulded part.

This document has been designed by the author of this book when he was responsible for the technical service at one of the leading plastic supplier in the nordic region.

You may think: Why should I spend time to fill it in when I can get all the parameters printed out direct from the computer system in my moulding machine?

The answer is that you would probably drown in all the figures and only with difficulty find the cause of the problem. You would also have difficulties to find the key parameters as the printing from different machines are completely different.

This document is perfect for use both in problem solving and as a basis for process and cost optimization as well as for documenting a test drive or a start-up of a new job.

If you fill in the document when the process is at best you will have good benchmarks to compare with when there is a disturbance in the process.

Therefore, we will closely examine the structure of this document and explain the meaning of the information in each input field. On the last page of this chapter is the document in full-page format.

Contact information

In the top part of the page there are some fields that can be filled in. If you only plan to use the page for internal documentation it will probably be redundant to fill in these data.

However you should always fill in the date and contact person. If you after several years need to go back and see how a particular setting was made, it is usually interesting to know who did it and get additional information.

It is also important to know when the setting was made if for example several settings have been made over time.

Should you use the document to communicate externally with a raw material supplier or a sister company etc. it also facilitates if the contact details are filled out.

Fig 443. The working tool "Injection moulding process analysis", which is described in this chapter.

Fig 444. Contact information.

Chapter 26 – Injection moulding process parameters

In this chapter, we will publish the main injection moulding parameters for a number of thermoplastics.

When setting an injection moulding machine with a new resin, you should always use the recommended process data by the raw material producer if available. If you don't have them look on the producer's website or search for them on the Internet.

NOTE! The values shown in the tables on the next page are typical for an unmodified standard grade of the polymer in question and serves only as a rough guide.

The melt temperature is one of the most important parameters. When processing semi-crystalline plastics you should always consider the risk that you may get unmelted granules in the melt. To eliminate this risk, you should use the cylinder temperature profile that depends on the capacity utilization of the cylinder. See chapter 25, page 179. You should also be aware that additives such as flame retardants or impact modifiers often require a lower temperature than the standard grade. Glass fiber reinforced grades should have, as a rule the same temperature settings as unreinforced grades.

The mold temperature is also one of the most important parameters for achieving the best quality. For semi-crystalline plastics you need a certain temperature to ensure that the material's crystal structure will be correct and thus provide the best strength and dimensional stability (less post-shrinkage). See chapter 25, page 181.

Drying is needed for plastics that are either hygroscopic (absorbs moisture) or sensitive for hydrolysis (degrade chemically by moisture). See more in chapter 25, page 178. We recommend that moulders should use dehumidifying (dry air) dryers in their production. Therefore we publish both the *temperature* and *drying time* needed to be below the maximum allowed moisture content for the material, provided that the dry air dryer is working with a sufficiently low *dew point*.

Note also that if you dry the material longer than the indicated time in the table you should reduce the temperature 10-20 °C because some materials can oxidize or degrade thermally. Material which "*Need normally not to be dried!*" are recommended in the table may still need to be dried if condensation will occur on the surface of the granules. If this is the case, a drying temperature of 80 °C and a drying time of 1-2 hours usually work well.

The reason that the maximum **Peripheral speed** is published in the tables is that many moulders in good faith are dosing up the next shot with too high screw speed and thus unnecessarily degrade the polymer chains in the cylinder by high shear and friction resulting in poorer quality. On page 187 in chapter 25 you will find a formula where you can calculate the maximum allowed peripheral speed to maximum allowed rotation speed depending on the screw diameter. If you can not find the recommended maximum peripheral speed for you resin you should take into account that high-viscosity grades sometimes require 30% lower rotation speed compared to a less viscous standard grade. For example impact modified acetal with a melt index 1-2 g/10 min, has a recommended maximum peripheral speed of 0.2 m/s compared to 0.3 m/s for a standard grade with melt index of 5-10 g/10 min. For glass fibre reinforced grades you will usually find the recommended maximum peripheral speed to be 30-50% of the speed for the unreinforced grade. Also, impact modified, flame retardant grades use to be more sensitive to shear than standard grades.

Having sufficiently high **Hold pressure** is especially important for semi-crystalline plastics. Usually it is recommended to have as high pressure as possible without getting flashes in the parting line or having ejection problems. We publish hold pressures because many moulders sometimes in good faith set far too low hold pressure resulting in poorer quality.

Other important parameters such as hold pressure time, hold pressure switch, back pressure, injection speed, decompression are more dependent on the part design and machine conditions. We therefore can not give any general values of these parameters, but refer instead to chapter 25.

Chapter 27 – Problem solving and quality management

Increased quality demands

The accelerating developments in both processing technology and thermoplastics have led to new uses, such as metal replacement, electronics and medical technology. At the same time the demands on plastic components have increased when it comes to performance, appearance and other characteristics. The slightest deviation from the requirements and specifications must immediately be addressed and thus the goal for many moulders is to deliver error free products (0 – tolerance) while keeping their own rejects below 0.5 % at high utilization of their machines. We can no longer accept the previous "hysterical" troubleshooting methods, where changing of the process parameters (sometimes several at the same time) immediately were made without any detailed analysis of the problem as soon as there were an unacceptable deviation from the specifications. To meet the increasing and intense competition, you have to work with both statistical problem solving methods and process control. In this chapter we will describe some of these:

- ATS - Analytical troubleshooting
- DOE - Design of experiments
- FMEA - Failure Mode Effect Analysis

In the next chapter, we will describe a large number of errors that can occur during injection moulding of thermoplastics and how to solve them.

Analytical Troubleshooting - ATS

The word "problem" is often used in different meanings such as production problems, decisions, and plans to be implemented, etc. This diversity can create a lot of confusion when it comes to communication with others.

To be able to work on problems in a systematic and organized way within the area of Analytical Troubleshooting – AFS this has required very specific definitions of the word "problem." This has led to the improvement of communication and understanding of the parties involved.

Definition of the problem

A problem always consists of a *cause* and an undesirable *deviation*. Below is an example of this.



Fig 492. The black specs that you can see on the red button of the safety belt lock are unacceptable deviations. This is normally defined as a surface defect.

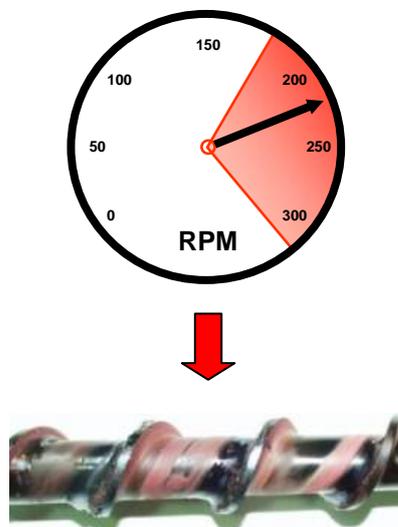


Fig 493. The cause of these black specs is usually due to the use of too high screw speed of the injection moulding machine. This leads to a screw deposit on the surface of the screw that degrades thermally and cause the specs on the surface of the button.

Chapter 28 – Trouble shooting – causes and effects

Moulding problems

In previous chapters we have dealt with defects caused by bad material. In this chapter we will discuss process-related errors. These can generally be divided into the following main groups:

- 1) Fill ratio which means unfilled or overfilled parts
- 2) Surface defects
- 3) Strength problems
- 4) Dimensional problems
- 5) Production problems

In general process problems belong to several of the main groups.

In order to identify and classify a problem and then find possible causes for it you should ask the following questions:

- 1) What kind of problem is it?
- 2) What has changed?
- 3) When did this happen?
- 4) Where do the error/errors occur:
 - On the part / parts (the same place or randomly)?
 - In the production cycle?
- 5) How often does it occur?
- 6) How serious is it?

PROBLEM / DEVIATION ANALYSIS

Please use the tab key when completing the page

Product: _____ Part no.: _____ Customer: _____ Reset

Contact person: _____ Phone no.: _____ E-mail: _____ Date: _____

WHAT has happened? Deviation from Setpoint:

Space for photo

Click here before the photo file is pasted

Click here after the photo file has been

WHERE was the problem / deviation discovered?

At our quality control At our assembly line At our customer By the consumer

WHERE on the part / parts was the problem / deviation discovered?

On a single part Parts from all cavities On the same spot All over the part

WHEN was the problem / deviation discovered?

At starting up Change of shift Change of batch By ocular inspection

WHO discovered the problem / deviation?

Frequency, how often is the symptom / deviation?

When in the life cycle does the problem / deviation occur?

The problem / deviation occurs: How and then? Very rarely Has never earlier been observed

HOW serious is the problem / deviation?

Few parts Quantity that needs to be fixed Priority: High Median Low

Classification of the problem / deviation:

Small disturbance Recurring problem Starting up problem Complex problem Warning signal

Other comments:

CAUSAL ANALYSIS

Please use the tab key when completing the page

Reset

Probable ROOT CAUSE (in a complex problem it may be more than one)

Material dependent Process dependent Mould dependent Incorrectly designed part

CAUSES (List the most likely causes in the most logical order):

1. _____

2. _____

3. _____

4. _____

5. _____

The above CAUSES can be verified by:

1. _____

2. _____

3. _____

4. _____

5. _____

Actions needed to be taken to correct the existing problem:

Actions needed to be taken on other machines / moulds / equipment or procedure changes:

Other comments / solution to the problem:

Fig 507. Forms for the analysis of problems in Excel format are available at: www.brucon.se

We will now describe a wide range of common and uncommon errors that can occur during the injection moulding process. We have also tried to list the causes of the most probable ones in a logic order, based on a large number of troubleshooting guides issued by leading plastic suppliers.

NOTE! When troubleshooting, it is important that the material supplier's process recommendations for the relevant material are available to adjust any incorrect settings.

Chapter 29 – Statistical Process Control SPC

Statistical process control is a method that has long been used in the engineering industry to improve the quality of produced products. Regarding the production of plastic products it has not yet been put into use on a large scale (2014). SPC among moulders is however in strong growth. In this chapter we will orient the reader about the principles and different concepts used. This chapter has been developed together with Nielsen Consulting (www.nielsenconsulting.se), a Swedish consultant specialized in SPC training, who has contributed with text and images.

Why SPC?

SPC is a very useful and profitable method because it:

- **Creates customer value** i.e. improves the function or extends the lifetime of the customer's product
- **Reduces scrap** by focusing on tolerance center (see terms below) instead of the tolerance limits
- **Prevents failure** of the products as actions are taken at the right time
- **Reduces the need for final inspection** i.e. deliveries with high capability (see terms below) need not be checked out
- **Promotes customer relations** as high capability allows the customer to take the goods without incoming inspection
- **Detects machine failure** at an early stage and thus becomes an aid in state-based maintenance
- **Reduces inventory costs** by error free deliveries and allows reduced inventory
- **Can reduce stress** in production as the need to measure and control the process will be more rarely
- **Can facilitate price discussions** as accurate deliveries usually means more satisfied customers
- **May increase staff engagement** through increased understanding of the process as it is easier to see patterns and trends in the process
- **Provides uniform approach** when there is no room for "sole and absolute discretion"
- **Is a tool in the Lean process** that provides continuous improvement with focus on the customer

Definitions in SPC

Normal distribution (Gaussian dispersion)

This is the way in which the measured values, in most cases, will be distributed as a result of the random spread around its mean value (highest point of the hump), see the figure to the right.

Notice that most of the measured values are around the hump and that there are fewer values closer to the periphery. It is in other words not very likely that you at all, under random sampling, will find some details at the periphery. It is not enough that the details that you happen to measure fall within the tolerance range. To see the Gaussian dispersion many details need to be measured and it may be time consuming. But there is shortcut by using the standard deviation!

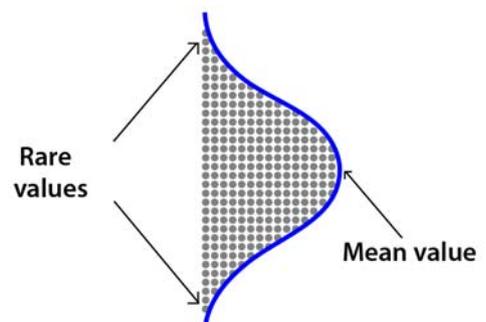


Fig 615. Normal distribution and mean value.

a

Chap 30 – Internet links, literature references and index

Internet links

Following companies have contributed with information and/or photos for this book and is highly recommended if you need more information about their products or services:

Company	Internet link	Product or service	Photo page
Acron Formservice AB	www.acron-form.se	Provider of rapid prototypings	116
Ad Manus Materialteknik AB	www.ad-manus.se	Provider of training/testing/analysis	
AD-Plast AB	www.ad-plast.se	Provider of injection mouldings	47
Arkema	www.arkema.com	Producer of plastic raw material	57
Arla Plast AB	www.arlaplast.se	Provider of extrusion	171
Arta Plast AB	www.artaplast.se	Provider of injection mouldings	171
Bergo Flooring AB	www.bergoflooring.se	Producer of plastic flooring	24
Clariant Sverige AB	www.clariant.com	Masterbatch producer	66
Digital Mechanics AB	www.digitalmechanics.se	Provider of rapid prototypings	119
Distrupol Nordic AB	www.distrupol.com	Distributor of plastic raw material	
DuPont Engineering Polymers	plastics.dupont.com	Producer of plastic raw material	> 50
DSM	www.dsm.com	Producer of plastic raw material	
DST Control AB	www.dst.se	Producer of electro-optical systems	122
Elasto Sweden AB	www.elastoteknik.se	Producer of thermoplastic elastomers	85
Engel Sverige AB	www.engelglobal.com	Producer of inj. moulding machines	85
Erteco Rubber & Plastics AB	www.erp.se	Distributor of plastic raw material	51
European Bioplastics	www.en.european-bioplastics.org/	European trade organisation	95
Ferbe Tools AB	www.ferbe.se	Mould maker	95
Flexlink AB	www.flexlink.com	Producer of conveyors	34
Hammarplast Consumer AB	www.hammarplast.se	Producer of storage products	93
Hordagruppen AB	www.hordagruppen.com	Provider of blow mouldings	
IMCD Sweden AB	www.imcd.se	Distributor of bio plastics	
Injection Mold - M Kröckel	www.injection-mold.info	Provider of mould graphics	94
IKEM	www.ikem.se	Swedish trade organisation (training)	94
K.D. Feddersen Norden AB	www.kdfeddersen.com	Distributor of raw material & machines	
Makeni AB	www.makeni.se	Provider of injection mouldings	29
Mape Plastic AB	www.mapeplastics.se	Distributor of plastic raw material	49
Mettler Toledo AB	www.se.mt.com	Producer of equipment for analysis	82
Miljösäck AB	www.miljosack.se	Producer of climate-smart plastic bags	149
Nordic Polymers Sverige AB	www.nordicpolymers.dk	Distributor of plastic raw material	
Novamont S.p.A.	www.novamont.com	Producer of bio plastics	55
Plastinject AB	www.plastinject.se	Provider of injection mouldings	24
Polykemi AB	www.polykemi.se	Producer of plastic raw material	32
Polymerfront AB	www.polymerfront.se	Distributor of plastic raw material	58
Polyplank AB	www.polyplank.se	Provider of recycled products	19
Protech AB	www.protech.se	Producer of rapid prototyping equipm.	120
Re8 Bioplastic AB	www.re8.se	Producer of bio plastics	58
Resinex Nordic AB	www.resinex.se	Distributor of plastic raw material	
Rotationsplast AB	www.rotationsplast.se	Provider of rotational mouldings	133
Sematron AB	www.sematron.se	Provider of vacuum forming	134
Stebro Plast AB	www.stebro.se	Provider of injection mouldings	169
Talent Plastics AB	www.talentplastics.se	Provider of inj. mouldings & extrusion	58
Celanese	www.celanese.com	Producer of plastic raw material	48
Tojos Plast AB	www.tojos.se	Provider of injection mouldings	56
Vadstena Lasermärkning	www.lasermarkning.se	Distributor of laser marking equipm.	91
Weland Medical AB	www.weloc.com	Producer of plastic clips	13